


FUNCTION GENERATORS & WAVEFORM SYNTHESIZERS

Synthesizer/Function Generator 1 μ Hz to 21 MHz

HP 3325B, 3326A

- Fully synthesized microhertz resolution
- Functions—sine, square, triangle, ramps, arbs, dc offset
- Internal programmable modulation source
- Log, lin, discrete sweep
- Excellent signal purity
- dc to 60 MHz SYNC output

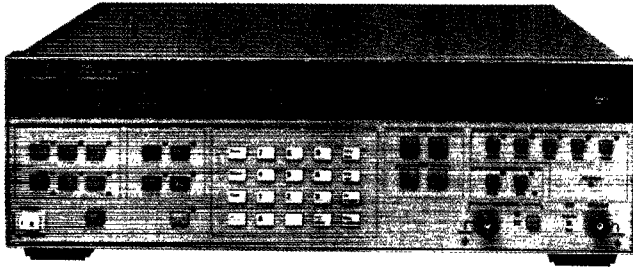

HP 3325B

DESIGNED FOR
MATE
SYSTEMS

HP 3325 Synthesizer/Function Generator

The HP 3325B is a 1 μ Hz to 21 MHz synthesizer/function generator with high performance, exceptional versatility and value. Testing is made fast and efficient in general purpose applications whether on the bench or in ATE systems.

Synthesizer Precision

HP 3325B frequency accuracy is determined by a precision frequency reference and can be set with a resolution of 1 μ Hz. It has up to -65 dBc harmonic and -70 dBc spurious levels for precision measurements. The phase of the output signal can be precisely controlled ± 719.9 deg with 0.1 deg resolution, and multiple HP 3325Bs can be locked together for multi-phase applications.

Function Generator Versatility

Precision squarewaves to 10,999,999 MHz have 20 ns rise times with synthesizer accuracy and precision. Triangle and ramp waveshapes are also available with .05 percent linearity up to 10,999,999 kHz. DC and phase offset can be added to these waveshapes. The modulation source can be used as an arbitrary function generator via HP-IB, providing user-defined waveshapes. These features make the HP 3325B one of the most versatile sources for bench or ATE system applications. Save-recall memory includes 10 nonvolatile memory locations for simple and rapid access to frequently used test setups.

Discrete Sweep

The enhanced feature set of the HP 3325B includes 100-segment discrete sweep capability which allows arbitrarily defined multi-segment linear or stepped sweeps and tone sequences. This complements its linear and log, phase continuous sweep capability.

Internal Modulation Source

A built-in programmable modulation source provides sine, square, and arbitrary waveshapes for internal amplitude or phase modulation, or for use as a second source. In addition, a rear panel sync output provides a TTL compatible dc to 60 MHz signal with 1 μ Hz resolution for use as a precision, high-resolution clock signal, and extended frequency coverage.

ATE Systems Compatibility

All functions, including frequency, amplitude, phase, modulation, sweep, and waveshapes, are programmable via HP-IB or RS-232 interface. The HP 3325B is fully compatible in form, fit, and function with the HP 3325A. All HP-IB programs written for the HP 3325A are fully compatible with the HP 3325B.

Specifications

Waveforms

Sine, square, triangle, negative, and positive ramps

Frequency

Range

Sine: 1 μ Hz to 20,999 999 999 MHz

Square: 1 μ Hz to 10,999 999 999 MHz

Triangle/ramps: 1 μ Hz to 10,999 999 999 kHz

Resolution: 1 μ Hz, < 100 kHz
1 MHz \geq 100 kHz

Accuracy: $\pm 5 \times 10^{-6}$, 20° to 30° C at time of calibration

Warm-up time: 20 minutes to within specified accuracy

Main signal output (all waveforms)

Impedance: 50 Ω

Connector: BNC; switchable to front or rear panel, nonswitchable with Option 002, except by internal cable change.

Amplitude

Range: 1 mV to 10 Vp-p in 8 amplitude ranges, 1-3-10 sequence (10 dB steps), into 50 Ω load

Function	Sine		Square		Triangle/Ramps	
	min	max	min	max	min	max
Units Displayed						
peak-peak	1.000 mV	10.00 V	1.000 mV	10.00 V	1.000 mV	10.00 V
rms	0.354 mV	3.536 V	0.500 mV	5.000 V	0.289 mV	2.887 V
dBm (50 Ω)	-56.02	+23.98	-53.01	+26.99	-57.78	+22.22

Resolution: 0.03% of full range or 0.01 dB (4 digits)

Amplitude accuracy

(without dc offset, relative to programmed amplitude and accuracy)

Sine wave amplitude accuracy

1 MHz to 100 kHz: ± 0.1 dB, ≥ 3 Vpp; ± 0.2 dB, < 3 Vpp

100 kHz to 20 MHz: ± 0.4 dB, ≥ 3 Vpp; ± 0.6 dB, 0.1 to 3 Vpp

Sine wave spectral purity

Phase noise: -60 dB for a 30 kHz band centered on a 20 MHz carrier (excluding ± 1 Hz about the carrier) with high-stability Option 001 installed.

Spurious: All non-harmonically related output signals will be more than 70 dB below the carrier (60 dB with dc offset) or less than -90 dBm, whichever is greater.

Sine wave harmonic distortion: Harmonically related signals will be less than the following levels (relative to the fundamental) at full output for each range:

0.1 Hz	50 kHz	200 kHz	2 MHz	15 MHz	20 MHz
-65 dB	-60 dB	-40 dB	-30 dB	-25 dB	

Square wave characteristics

Rise/fall time: ≤ 20 ns, 10% to 90% at full output

Overshoot: $\leq 5\%$ of peak-to-peak amplitude, at full output

Settling time: < 1 μ s to settle to within .05% of final value

DC offset

Range: dc only (no ac signal): 0 to ± 5.0 V/50 Ω

dc + ac: Maximum dc offset ± 4.5 V on highest range, decreasing to ± 4.5 mV on lowest range.

Resolution: 4 digits

Sine wave amplitude modulation

Modulation depth at full output for each range: 0 to 100%

Modulation frequency range: dc to 400 kHz (0 to 21 MHz carrier frequency)

Sensitivity: ± 5 V peak for 100% modulation

Sine wave phase modulation

Range: $\pm 850^\circ$, ± 5 V input

Modulation frequency range: dc - 5 kHz